Datasheet



# intAct Oldtimer-Power

Closed lead-acid battery with lead-calcium-silver grids | dry-charged | low maintenance

Art.No.

**11213**

| | |
|---|---|
| **Volt** | 6V |
| **Capacity** | 112 Ah (c20) |
| **CCR -18°C (EN)** | 540 A (EN) |
| **Electrolyte** | diluted sulphuric acid |
| **Electrolyte density** | 1,28 +/- 0,01 Kg/l (25° C) |
| **Size (LxWxH)** | 503 x 98 x 230 mm |
| **Weight** | 12,85 kg |
| **Pos. of Terminal** | **0** |
| **Terminal** | **1** |
| **Bodenleiste** | **-** |

**Usage**


## Starting power in retro look

The **intAct classic car power** combines state-of-the-art battery technology with a classic design and a **hard rubber surface,** perfect for classic car enthusiasts. It offers **excellent starting performance**. Its OEM quality was confirmed by the award as **"Test winner GTÜ test classic car batteries 06.2018"**. The battery is supplied dry pre-charged and must be filled with acid by a workshop or dealer before use.


**Advantages at a glance:**

- **Top starting performance**
- **Test winner GTÜ test for classic car batteries 06.2018**
- **Dry pre-charged** - requires acid filling before commissioning
- **Hard rubber look** for an authentic classic car look
- **Modern technology** in a classic design


**Size**



**Pos. of Terminal 0**



**Terminal 1**

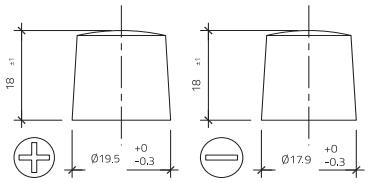


**Bodenleiste -**

As of 15.11.2026

KECKEISEN AKKUMULATOREN
**Stefan Keckeisen Akkumulatoren e.K.**
Europastraße 9
87700 Memmingen
Fon +49(0)8331 94444-0
Fax +49(0)8331 94444-9
info@intact-batterien.de
www.intact-batterien.de