



# intAct Start-Power

Calcium or hybrid battery (Ca/Ca or Sb/Ca)

Art.No.

## 52430SMF

Japancode

U1

<b>Volt</b>	12V
<b>Capacity</b>	24 AH (c20)
<b>CCR -18°C (EN)</b>	300 A (EN)
<b>Electrolyte</b>	diluted sulphuric acid
<b>Electrolyte density</b>	1,28 +/- 0,01 Kg/l (25 °C)
<b>Size (LxWxH)</b>	196 x 130 x 184 mm
<b>Weight</b>	8,2 kg
<b>Pos. of Terminal</b>	1
<b>Terminal</b>	4
<b>Bodenleiste</b>	-

### Usage




## Top performance at a great price

Developed for performance and extreme high-current capability at an absolutely perfect price-performance ratio. For almost all standard cars without many additional installations and other electrical consumers. Our recommendation for standard applications with low requirements and the best price-performance ratio.


- » **Powerful and reliable.**
- » **Double lid for increased leakage protection and gas condensation** (gaseous electrolyte condenses in the labyrinth lid and remains in the circuit).
- » **Filled and charged (GUG). Ready for immediate use.**
- » **Maintenance-free. No refilling of water necessary.**




Size



Pos. of Terminal 1



Terminal 4

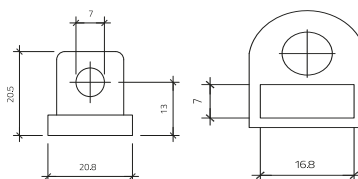

Bodenleiste -

As of 04.04.2025