



# intAct Start-Power

Calcium or hybrid battery (Ca/Ca or Sb/Ca)

Art.No.

## 54408GUG

|                     |                            |
|---------------------|----------------------------|
| Volt                | 12V                        |
| Capacity            | 44 AH (c20)                |
| CCR -18°C (EN)      | 390 A (EN)                 |
| Electrolyte         | diluted sulphuric acid     |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH)        | 175 x 175 x 190 mm         |
| Weight              | 10,3 kg                    |
| Pos. of Terminal    | 0                          |
| Terminal            | 1                          |
| Bodenleiste         | B13                        |

### Usage




### Top performance at a great price

Developed for performance and extreme high-current capability at an absolutely perfect price-performance ratio. For almost all standard cars without many additional installations and other electrical consumers. Our recommendation for standard applications with low requirements and the best price-performance ratio.


- » **Powerful and reliable.**
- » **Double lid for increased leakage protection and gas condensation** (gaseous electrolyte condenses in the labyrinth lid and remains in the circuit).
- » **Filled and charged (GUG). Ready for immediate use.**
- » **Maintenance-free. No refilling of water necessary.**



Size




Pos. of Terminal 0



Terminal 1



Bodenleiste B13

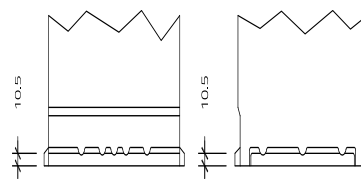

As of 02.04.2025