Datasheet



intAct Oldtimer-Power

Closed lead-acid battery with lead-calcium-silver grids | dry-charged | low maintenance

Art.No.

54419

Volt	12V
Capacity	44 Ah (c20)
CCR -18°C (EN)	200 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	207 x 175 x 175 mm
Weight	8,7 kg
Pos. of Terminal	**0**
Terminal	**1**
Bodenleiste	**B13**

Usage


Starting power in retro look

The **intAct classic car power** combines state-of-the-art battery technology with a classic design and a **hard rubber surface,** perfect for classic car enthusiasts. It offers **excellent starting performance**. Its OEM quality was confirmed by the award as **"Test winner GTÜ test classic car batteries 06.2018"**. The battery is supplied dry pre-charged and must be filled with acid by a workshop or dealer before use.


Advantages at a glance:

- **Top starting performance**
- **Test winner GTÜ test for classic car batteries 06.2018**
- **Dry pre-charged** - requires acid filling before commissioning
- **Hard rubber look** for an authentic classic car look
- **Modern technology** in a classic design


Size




Pos. of Terminal 0



Terminal 1

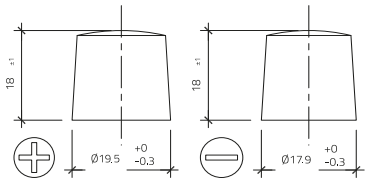

Bodenleiste B13

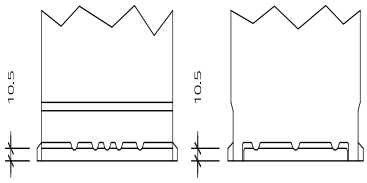

As of 15.11.2026

KECKEISEN AKKUMULATOREN
Stefan Keckeisen Akkumulatoren e.K.
Europastraße 9
87700 Memmingen
Fon +49(0)8331 94444-0
Fax +49(0)8331 94444-9
info@intact-batterien.de
www.intact-batterien.de