Datasheet



intAct Oldtimer-Power

Closed lead-acid battery with lead-calcium-silver grids | dry-charged | low maintenance

Art.No.

56037

Volt	12V
Capacity	60 Ah (c20)
CCR -18°C (EN)	280 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	260 x 173 x 225 mm
Weight	18 kg
Pos. of Terminal	**1**
Terminal	**1**
Bodenleiste	**-**

Usage


Starting power in retro look

The **intAct classic car power** combines state-of-the-art battery technology with a classic design and a **hard rubber surface,** perfect for classic car enthusiasts. It offers **excellent starting performance**. Its OEM quality was confirmed by the award as **"Test winner GTÜ test classic car batteries 06.2018"**. The battery is supplied dry pre-charged and must be filled with acid by a workshop or dealer before use.


Advantages at a glance:

- **Top starting performance**
- **Test winner GTÜ test for classic car batteries 06.2018**
- **Dry pre-charged** - requires acid filling before commissioning
- **Hard rubber look** for an authentic classic car look
- **Modern technology** in a classic design


Size



Pos. of Terminal 1



Terminal 1

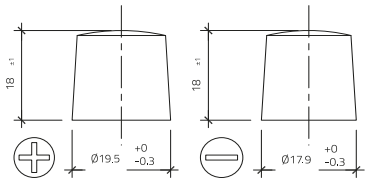

Bodenleiste -

As of 15.11.2026

KECKEISEN AKKUMULATOREN
Stefan Keckeisen Akkumulatoren e.K.
Europastraße 9
87700 Memmingen
Fon +49(0)8331 94444-0
Fax +49(0)8331 94444-9
info@intact-batterien.de
www.intact-batterien.de