



# intAct US-Power

Maintenance-free calcium battery (Ca/Ca) with expanded metal grids | wet charged

Art.No.

## 58010GUG

|                     |                            |
|---------------------|----------------------------|
| Volt                | 12V                        |
| Capacity            | 85 AH (c20)                |
| CCR -18°C (EN)      | 800 A (EN)                 |
| Electrolyte         | diluted sulphuric acid     |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH)        | 295 x 189 x 192 mm         |
| Weight              | 20,5 kg                    |
| Pos. of Terminal    | 1                          |
| Terminal            | 1                          |
| Bodenleiste         | B01                        |

### Usage



### For American vehicles


State-of-the-art high-performance batteries, where dimensions and end-pole types are matched to the requirements of U.S. vehicles. Our recommendation if installation dimensions and connections require a special battery.

- » **Very high cold start performance.**
- » **Minimal self-discharge.**
- » **2 versions: U.S. front terminal** with inside thread (Types 56010 and 57010) and **A-cone terminal** according to DIN 60095 T2 (Type 58010).
- » **Approval for charging voltages up to 14.8 volts.**
- » Wet charged. Maintenance-free. **Ready to use.**




Size


Pos. of Terminal 1



Terminal 1

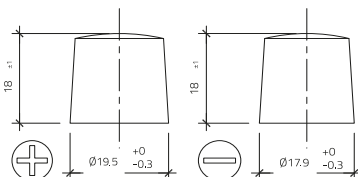

Bodenleiste B01

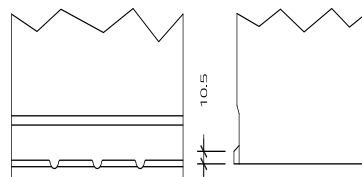

As of 02.04.2025