



# intAct Start-Stop-Power AGM

Sealed maintenance-free AGM battery | electrolyte absorbed in glass fibre mats | wet charged

Art.No.

## AGM50SS

Volt	12V
Capacity	50 AH (c20)
CCR -18°C (EN)	800 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	260 x 173 x 206 mm
Weight	17,5 kg
Pos. of Terminal	1
Terminal	1
Bodenleiste	B07

### Usage




### Start. Stop. Keep charging.

Enables a high number of engine starts and supplies all consumers when the motor stops. Perfect for taxis, medium and high-end cars, SUVs and trucks with start-stop systems and micro-hybrids with brake energy recovery (recuperation). Our recommendation for start-stop vehicles with high energy demand and micro-hybrids with recuperation.


- » Excellent starting characteristics even at low charge level.
- » Higher cycle stability and cold start performance than a standard starter battery of same case size. Resulting in a longer life expectancy.
- » Fantastic recharging behaviour in the partial charge range.
- » Also for vehicles with high energy requirements and/or a lot of additional equipment.
- » Double lid with safety valve (VRLA), gas recombination and backfire protection. Leak-proof.




Size




Pos. of Terminal 1



Terminal 1

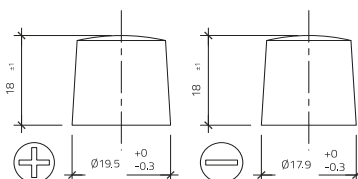

Bodenleiste B07

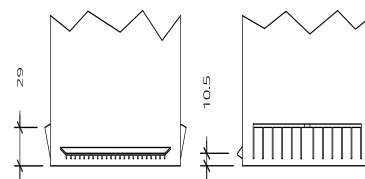

As of 02.04.2025