



# intAct Active-Power GEL

Sealed maintenance-free GEL battery with grid plates | electrolyte thickened into a gel-like mass | wet charged

Art.No.

**AP-GEL-125**

Volt	12V
Capacity	105Ah (c5), 140 Ah (c20), 158 Ah (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	349 x 175 x 290 mm
Weight	42,7 kg
Pos. of Terminal	0
Terminal	1
Bodenleiste	-

## Usage




## Maintain-free and uncomplicated

With low self-discharge for the seasonal operation of additional consumers on boats or in mobile homes. Robust power-supply for recreational and smaller solar applications. Our recommendation for anyone looking for a more cycle-resistant, spill-proof supply battery.


- » **Multifunctional battery for increased cyclical use.** 500 cycles according to IEC 254-1.
- » **Longer life expectancy** than conventional lead-acid batteries.
- » **Extremely resistant to vibration.**
- » **Sealed maintenance-free.** VRLA battery with gas recombination and safety valves, where refilling is neither possible nor necessary.
- » Wet charged. **Ready to use.**




### Size



### Pos. of Terminal 0



### Terminal 1

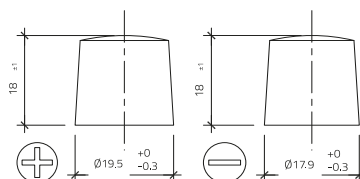

### Bodenleiste -

As of 31.07.2025