



intAct BackUp-Power

Sealed maintenance-free calcium battery (Ca/Ca) | electrolyte absorbed in glass fibre mats (AGM) | wet charged

Art.No.

BU30

| | |
|---------------------|----------------------------|
| Volt | 12V |
| Capacity | 30 Ah (c20) |
| CCR -18°C (EN) | - |
| Electrolyte | diluted sulphuric acid |
| Electrolyte density | 1,28 +/- 0,01 Kg/l (25° C) |
| Size (LxWxH) | 197 x 132 x 186 mm |
| Weight | 10,3 kg |
| Pos. of Terminal | 0 |
| Terminal | 1 |
| Bodenleiste | - |

Usage



Support for the starter battery

Supplies consumers in certain types of vehicles and keeps them charged during the start-up, thus protecting the electronics. Our recommendation as a reliable alternative to the original installed back-up battery.


- » Increased cold start performance.
- » Longer life expectancy. Three times more cycle resistant than conventional starter batteries.
- » Wet charged. Ready to use.
- » Sealed valve-regulated battery (VRLA) with gas recombination.
- » Sealed maintenance-free and leak-proof.
- » Electrolyte absorbed in glass fibre mat.
- » Lead-calcium alloy grid plates.




Size

Kasten: BU30

Pos. of Terminal 0



Terminal 1

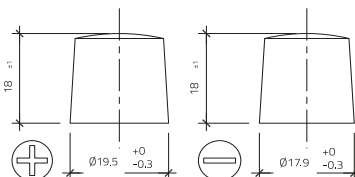

Bodenleiste -

As of 15.12.2025