



intAct BackUp-Power

Sealed calcium battery (Ca/Ca) | electrolyte absorbed in glass fibre mats (AGM) | filled and charged | absolutely maintenance-free

Art.No.

BU30

Volt	12V
Capacity	30 Ah (c20)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	197 x 132 x 186 mm
Weight	10,3 kg
Pos. of Terminal	0
Terminal	1
Bodenleiste	-

Usage



Support for the starter battery

Supplies consumers in certain types of vehicles and keeps them charged during the start-up, thus protecting the electronics. Our recommendation as a reliable alternative to the original installed back-up battery.


- » **Increased cold start performance.**
- » **Longer life expectancy. Three times more cycle resistant** than conventional starter batteries.
- » Wet charged. **Ready to use.**
- » **Sealed valve-regulated battery (VRLA)** with gas recombination.
- » **Sealed maintenance-free and leak-proof.**
- » **Electrolyte absorbed in glass fibre mat.**
- » **Lead-calcium alloy grid plates.**




Size

Kasten: BU30

Pos. of Terminal 0



Terminal 1

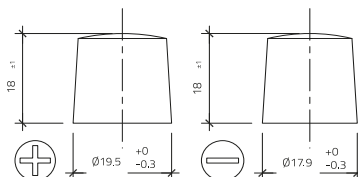

Bodenleiste -

As of 06.04.2026