



intAct GEL-Power


Sealed GEL battery with grid plates | electrolyte gel-bonded | filled and charged | absolutely maintenance-free

Art.No.

GEL-115

Volt	12V
Capacity	94 AH (c5), 115 AH (c20), 130 AH (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	286 x 269 x 230 mm
Weight	39 kg
Pos. of Terminal	4
Terminal	1
Bodenleiste	-

Usage

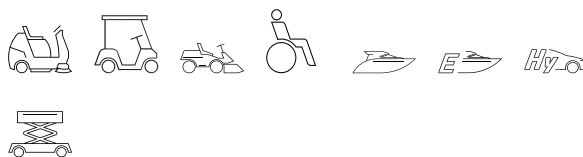

Easy to maintain in use

Perfectly suited as a traction or supply battery for a wide range of applications in private and business environments. Leak-proof, absolutely maintenance-free and robust thanks to the electrolyte defined in gel. Our recommendation for medium-cycle applications where leak-proof and maintenance-free operation are important.


- » For medium to heavy cyclical use. 400 - 700 cycles according to IEC 254-1.
- » Longer service life than flooded lead-acid batteries.
- » High vibration resistance.
- » Low self-discharge.
- » Available in 4-volt, 6-volt and 12-volt versions.
- » VRLA battery with gas recombination and safety valves, refilling is neither possible or necessary.
- » Sealed GEL battery with grid plates.




Size

Kasten: GEL-115

Pos. of Terminal 4



Terminal 1

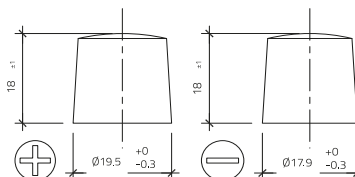

Bodenleiste -

As of 02.04.2025