



## intAct GEL-Power - Marine & Leisure

Sealed GEL battery with grid plates | electrolyte gel-bonded | filled and charged | absolutely maintenance-free

Art.No.

**GEL-50B**

Volt	12V
Capacity	40 Ah (c5), 50 Ah (c20), 55 Ah (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	242 x 175 x 190 mm
Weight	17,5 kg
Pos. of Terminal	0
Terminal	1
Bodenleiste	B13



### Usage




### Strong and maintenance-free


Perfect for professional storage and supply needs associated with renewable energy systems, coaches, campers or boats. Withstands charging-current fluctuations, relative deep discharges and continuous recharging. Our recommendation for anyone looking for a more cycle-resistant, spill-proof supply battery.

- » **For medium to heavy cyclic use.** 400 - 700 cycles according to IEC 254-1.
- » **Longer service life than flooded lead-acid battery.**
- » **High vibration resistance.**
- » **Low self-discharge.**
- » **In 6-volt and 12-volt versions.**
- » **Sealed GEL battery** with grid plates.
- » **VRLA battery with gas recombination and safety valves**, where refilling is neither possible or necessary.


### Size




### Pos. of Terminal 0



### Terminal 1

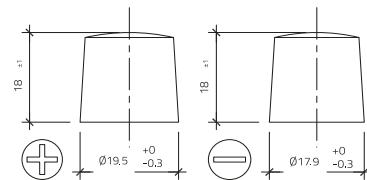

### Bodenleiste B13

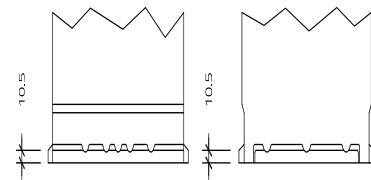

As of 12.01.2026