



# intAct GEL-Power


Sealed GEL battery with grid plates | electrolyte gel-bonded | filled and charged | absolutely maintenance-free

Art.No.

## GEL-50B

Volt	12V
Capacity	40 AH (c5), 50 AH (c20), 55 AH (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	242 x 175 x 190 mm
Weight	17,5 kg
Pos. of Terminal	0
Terminal	1
Bodenleiste	B13

### Usage

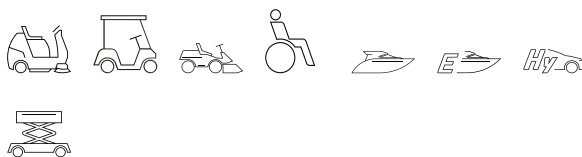


### Easy to maintain in use

Perfectly suited as a traction or supply battery for a wide range of applications in private and business environments. Leak-proof, absolutely maintenance-free and robust thanks to the electrolyte defined in gel. Our recommendation for medium-cycle applications where leak-proof and maintenance-free operation are important.

- » For medium to heavy cyclical use. 400 - 700 cycles according to IEC 254-1.
- » Longer service life than flooded lead-acid batteries.
- » High vibration resistance.
- » Low self-discharge.
- » Available in 4-volt, 6-volt and 12-volt versions.
- » VRLA battery with gas recombination and safety valves, refilling is neither possible or necessary.
- » Sealed GEL battery with grid plates.




Size



Pos. of Terminal 0



Terminal 1

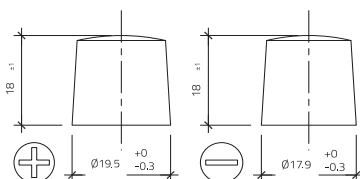

Bodenleiste B13



As of 02.04.2025