



# intAct GEL-Power


Sealed GEL battery with grid plates | electrolyte gel-bonded | filled and charged | absolutely maintenance-free

Art.No.

## GEL-60MK

Volt	12V
Capacity	47,4 Ah (c5), 60 Ah (c20), 70 Ah (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	259 x 166 x 178 mm
Weight	19,3 kg
Pos. of Terminal	0
Terminal	F-M6
Bodenleiste	-

### Usage

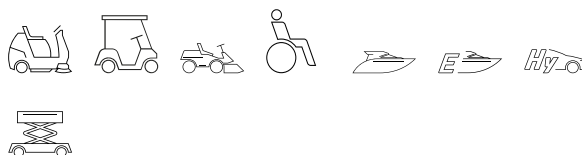


### Easy to maintain in use


Perfectly suited as a traction or supply battery for a wide range of applications in private and business environments. Leak-proof, absolutely maintenance-free and robust thanks to the electrolyte defined in gel. Our recommendation for medium-cycle applications where leak-proof and maintenance-free operation are important.

- » **For medium to heavy cyclical use.** 400 - 700 cycles according to IEC 254-1.
- » **Longer service life than flooded lead-acid batteries.**
- » **High vibration resistance.**
- » **Low self-discharge.**
- » Available in **4-volt, 6-volt and 12-volt versions.**
- » **VRLA battery with gas recombination and safety valves,** refilling is neither possible or necessary.
- » **Sealed GEL battery with grid plates.**


Size



Pos. of Terminal 0



Terminal F-M6



Bodenleiste -

As of 15.06.2025