



intAct Marine-Power

Closed lead-acid battery with reinforced grid plates | low maintenance

Art.No.

MP75

Volt	12V
Capacity	60 Ah (c5), 75 Ah (c20), 90 Ah (c100)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	278 x 175 x 190 mm
Weight	18 kg
Pos. of Terminal	0
Terminal	1
Bodenleiste	-



Usage



Cost-conscious marine battery


Robust technology with good capacity absorption and high capacity reserves for small supply tasks as well as good high current characteristics in light cyclic use. Our recommendation for small dual-purpose applications on boats.

- » **Light cyclic use.** 300 cycles according to IEC 254-1.
- » **Reinforced grid plates** in special insulation with high mass utilization for maximum reserve capacity.
- » Robust, technically simple, mature technology for **applications with low, reliable power requirements.**
- » **Ideal for stand-by operation.**
- » **Excellent price/performance ratio.** Durable, safe and reliable.


Size

Kasten: **MP75**

Pos. of Terminal 0



Terminal 1

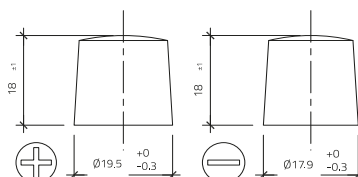

Bodenleiste -

As of 01.08.2025