



intAct Traktion-Power Deepcycle

Lead-acid battery | reinforced grid plates | filled and charged

Art.No.

T105-LP

Volt	6V
Capacity	185 AH (c5), 225 AH (c20), 250 AH (c100)
CCR -18°C (EN)	k.A. A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	262 x 181 x 281 mm
Weight	29,4 kg
Pos. of Terminal	0
Terminal	1
Bodenleiste	-

Usage




More working hours, more flexibility

The robust battery for many deep discharges and flexible charging. Perfect as a power supplier for small vehicles in the commercial and leisure sector that should have little downtime. Our recommendation for much longer-lasting grid plate batteries in special sizes.


- » **Very high life expectancy.** 600 cycles according to IEC 254-1 for medium to heavy cyclic use.
- » Available as **wet battery**. Closed and low maintenance.
- » **6 and 8 volt versions.**
- » Proven technology for **medium power** applications.
- » **Reinforced grid plates** with higher performance active material **for greater reliability.**




Size



Pos. of Terminal 0



Terminal 1

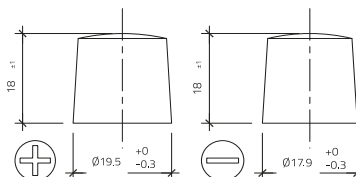

Bodenleiste -

As of 02.04.2025