Datasheet




# intact Start-Power Truck

Closed calcium battery (Ca/Ca) | filled and charged | maintenance-free

Art.No.

## 61040GUG

| | |
|---|---|
| **Volt** | 12V |
| **Capacity** | 110 Ah (c20) |
| **CCR -18°C (EN)** | 760 A (EN) |
| **Electrolyte** | diluted sulphuric acid |
| **Electrolyte density** | 1,28 +/- 0,01 Kg/l (25° C) |
| **Size (LxWxH)** | 514 x 175 x 210 mm |
| **Weight** | 30,5 kg |
| **Pos. of Terminal** | **3** |
| **Terminal** | **1** |
| **Bodenleiste** | **B13** |

**Usage**

## Top performance at a good price

The **intAct Start-Power Truck** is a powerful and reliable truck starter battery for standard commercial vehicles without high additional energy requirements. Developed for high starting currents and a particularly good price-performance ratio, it impresses in daily use with its robust technology and reliable starting power. The special double lid with labyrinth system ensures increased leakage protection and reduces fluid loss due to gas condensation. The battery is supplied filled and charged and is ready for immediate use.

**Advantages at a glance:**

- For standard trucks and commercial vehicles
- **High starting performance** and reliable starting behavior
- **Double cap technology** for increased leakage protection and gas condensation
- Maintenance-free** - no need to top up with water
- Some types also available as **SHD variant vibration-proof according to V3**
- **Filled and charged** - ready for immediate use
- Robust and proven lead-acid technology for daily use

**Size**



**Pos. of Terminal 3**



**Terminal 1**

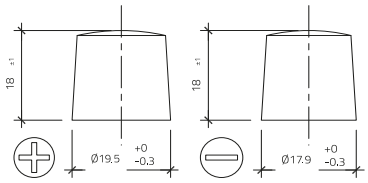


**Bodenleiste B13**

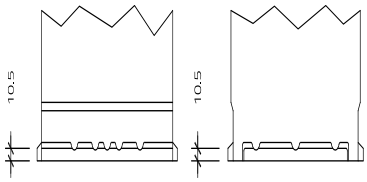


As of 25.11.2026

KECKEISEN AKKUMULATOREN
**Stefan Keckeisen Akkumulatoren e.K.**
Europastraße 9
87700 Memmingen
Fon +49(0)8331 94444-0
Fax +49(0)8331 94444-9
info@intact-batterien.de
www.intact-batterien.de